

IRONGARD™ MAINTENANCE SOLUTIONS

CLEANERS | ELECTRICAL PRODUCTS | SEED LUBRICANTS | LUBRICANTS | STARTING FLUIDS
FUEL TREATMENTS | RADIATOR PRODUCTS | ADHESIVES | GASKETING | THREADLOCKERS
THREAD SEALANTS | BEARING MOUNTS




INTRODUCTION

When you choose Irongard™ Maintenance Solutions from CNH Industrial Genuine Parts, you can rest assured that you're choosing the very best. The same no compromises approach we take with our equipment is evident in the quality and performance of the products you'll find in this catalog. Whether you're looking for cleaners, sealants or adhesives, you can trust Irongard products from CNH Industrial Genuine Parts to deliver the maintenance solutions you need. If you have any questions or if you'd like to place an order, please don't hesitate to call your CNH Industrial Genuine Parts dealer today.



TABLE OF CONTENTS



CLEANERS

Gasket Remover	4
Glass Cleaner	4
Brake Parts Cleaner	4
Foaming Engine Degreaser	4
Carb & Choke Cleaner.....	4
All-Purpose Cleaner & Degreaser.....	5
Equipment Quick Wax.....	5
Surface Cleaner	5
Polish Cloth	5
Equipment Wax.....	6
Equipment Cleaner and Detail.....	6
Equipment Quick Shine.....	6
Fluid Film	6
Magic Mix Metal Polish	6
Micro Fiber Cloth	6

ELECTRICAL PRODUCTS

Battery Cleaner.....	7
Battery Saver.....	7
Electrical Contact & Parts Cleaner.....	7

SEED LUBRICANTS

Graphite Seed Flow	8
Non-Stick Graphite Lubricant.....	8
Talc/Graphite Seed Flow	8
Dispensing Cap	8
Bayer Fluency Agent	8

LUBRICANTS

EP Gear Grease.....	9
Industrial-Strength Rust Penetrant.....	9
Heavy-Duty Silicone Lubricant	9
Anti-Seize Lubricant	9
Penetrating Oil.....	9
White Lithium Grease	10
Chain & Cable Lube	10
Wheel Bearing Grease	10
Friction Modifier	10
Gear Oil	10
Bar and Chain Oil.....	10

STARTING FLUIDS

Premium Starting Fluid	11
------------------------------	----

FUEL TREATMENTS

Diesel Fuel Conditioner	12
Diesel Fuel Anti-Gel	12

RADIATOR PRODUCTS

Radiator Stop Leak	13
--------------------------	----

HYDRAULIC PRODUCTS

Hydraulic Brake Oil	13
Hydraulic Brake Oil-LHM Fluid	13

ADHESIVES

Devcon® Plastic Welder™	14
Devcon 5 Minute® Epoxy Amber	14

GASKETING

The Right Stuff® Gasket Maker	15
Permatex® Form-A-Gasket #2 Sealant ...	15
Permatex Aviation Form-A-Gasket #3 Sealant	15
High-Temperature Anaerobic Gasket Maker	16
Anaerobic Gasket Maker.....	16
Anaerobic Flange Sealant	16

GASKETING – RTV

Red RTV Silicone	17
Clear RTV Silicone Adhesive Sealant	17
Black RTV Silicone Adhesive Sealant.....	17
Ultra Black® Gasket Maker	18
Permatex Ultra Grey® Gasket Maker	18
Ultra Blue® Gasket Maker	18

THREADLOCKERS

Medium Strength Threadlocker Blue	19
Surface Insensitive Threadlocker Blue... ..	20
High Strength Threadlocker Red	20
Large Diameter Threadlocker Red.....	20
Permanent Strength Threadlocker Red	20
Permatex Penetrating Grade Threadlocker Green	21
Permatex High Strength Threadlocker Red Gel	21
Permatex Medium Strength Threadlocker Blue Gel.....	21

THREAD SEALANTS

High-Temperature Thread Sealant	22
---------------------------------------	----

BEARING MOUNTS

Retaining Compound For Close Fits.....	23
Retaining Compound For Relaxed Fits... ..	23

MISCELLANEOUS PRODUCTS

Heavy-Duty Brake Fluid	24
Sanden SP-15	24
HD Allision Transmission Oil.....	24
Belt Dressing	24
Anti-Chatter Additive.....	24
Fiber Tip Paint Marker Set.....	24
Drivetrain Fluid	24
Synthetic Power Steering Fluid	25
Tire Sealant 1 Gallon Pump Bottle.....	25
Premium Marking Foam	25
Power Steering Fluid.....	25
Tilcoat	25
Paint Hardener.....	25

PAINT CHARTS

Agriculture Enamel Paint Chart	26
Construction Enamel Paint Chart.....	27
All Makes, Thinner & Primer.....	27
All Makes Agriculture & Construction Paint Chart.....	28

INDEX

Product Index	29
---------------------	----

PLANOGRAM

Chemicals Merchandising Products	32
--	----

CLEANERS

Clean & Protect

Clean and protect your equipment with Irongard's line of degreasers and cleaners. Once your equipment is free of dirt and grease, protect it with equipment wax for a long-lasting, brilliant shine.



Gasket Remover

Removes form-in-place chemical gaskets, baked-on cut gaskets, gasket cements, dried oil, grease and paint from any type of metal in minutes. Strips carbon deposits from valves, heads and pistons. Reduces excessive scraping and potential damage to flange surfaces. Safe for use on all types of metals. Not for use on plastic, tile, linoleum or synthetic fabrics.

ITEM	CONTAINER SIZE
B505510	12 oz / 340 g



Foaming Engine Degreaser

Cuts oil, grease, sludge and dirt. Spray on, wait 10 minutes and rinse off. Removes caked-on grease. Water rinsable.

Suggested Applications: Engine parts, concrete floors, farm and construction equipment.

ITEM	CONTAINER SIZE
B505512	15 oz / 425 g



Glass Cleaner

CNH Industrial Genuine Parts Glass Cleaner will clean, shine and polish all glass and plastic surfaces. Leaves a clear streak-free finish.

ITEM	CONTAINER SIZE
ZRG018GLC	18.5 oz / 524 g



Carb & Choke Cleaner

CNH Industrial Genuine Parts Carb and Choke Cleaner removes deposited gum, grease and gasoline residue from carburetors, choke linkages and external metal engine parts. Smooths rough idle. Purges excess deposits from fuel intake system to restore power, economy and performance. Also ideal for spray cleaning of varnished steel or cast iron parts normally hand cleaned on bench operations. Helps ensure faster starts, smoother idle and maximum power from your engine. Also cleans and degreases metal parts of all kinds.

Suggested Applications: Carburetors, choke mechanisms and PCV valves.

	ITEM	CONTAINER SIZE
	ZRG017CRBCCAN	20 oz / 567 g



Brake Parts Cleaner

CNH Industrial Genuine Parts Brake Parts Cleaner is a non-chlorinated formula specially designed to completely clean all metal brake parts of grease, oil and brake fluid residue. Loosens brake dust for easy removal.

Suggested Applications: Brakes, tools and equipment.

	ITEM	CONTAINER SIZE
	ZRG017BRC	16 oz / 454 g
	ZRG017BRCCAN	20 oz / 567 g



All-Purpose Cleaner & Degreaser

Biodegradable, all-purpose, industrial strength, concentrated cleaner and degreaser. This product is formulated for wipe down, pressure spraying and immersion cleaning process at room temperature or heated. Citrus scented and non-flammable 22-oz spray bottle is a 1:1 dilution, ready to use spray. One gallon is full strength ready for dilution.

Suggested Applications: Removes grease, grime, oil, cutting fluids, mildew and animal fat. Cleans engine parts, exhaust hoods and drilling rigs. Cleans greasy tools. Cleans cement floors. Water dilutable for glass cleaner. Removes finger prints and smudges.

ITEM	CONTAINER SIZE
B505517	22 oz / 651 ml
B505518	1 gal / 3.784 L



Surface Cleaner

Fast evaporating cleaner quickly removes oil and grease from metal parts and surfaces. Will not cause corrosion.

Suggested Applications: Use as a final wash before assembly. Improves gasket, sealant and paint adhesion. Cleans hand tools. Cleans power transmission chains. Cleans oily engine parts. Dissolves motor oil residue. Cleans paint from spray guns.

	ITEM	CONTAINER SIZE
	ZRG017SUL	11.5 oz / 326 g



Equipment Quick Wax

Equipment Quick Wax 16 oz bottle is a quick detailer that contains wax. It delivers a shine that protects between hand waxes and washings.

ITEM	CONTAINER SIZE
MCNH7205	16 oz / 454 g



Polish Cloth

Polish Cloth has unique perforations that pick up and hold polish, wax, and dirt better than micro-fiber cloths to shine surfaces fast and easy.

ITEM	CONTAINER SIZE
MCNH7207	—





Equipment Wax

Equipment Wax gives painted and polished surfaces a protective coating (without buffing) that lasts for several months.

ITEM	CONTAINER SIZE
MCNH7201	8 oz



Fluid Film

Fluid Film is a unique lanolin based brand of corrosion preventive and lubricant in liquid form.

ITEM	CONTAINER SIZE
MCNAS80Z	8 oz
MCNAS1GAL	1 gal / 3.784 L
MCNAS5GAL	5 gal



Equipment Cleaner and Detail

Equipment Cleaner and Detail is a heavy-duty detailer designed to go a step beyond conventional cleaning products to remove oil, grease, and other hard to remove substances.

ITEM	CONTAINER SIZE
MCNH7202	16 oz / 454 g

Magic Mix Metal Polish

Magic Mix Metal Polish is superior to traditional metal polishes in that it can be applied to a large surface, allowed to dry, and will simply dust off. Shines and protects aluminum, stainless steel, chrome, and many other common metal surfaces.

ITEM	CONTAINER SIZE
73343736	8 oz / 227 g



Equipment Quick Shine

Equipment Quick Shine is a multipurpose cleaner/detailer that delivers a quick, professional shine. Its spray-on, wipe-off shine can be applied directly onto warm surfaces, even in direct sunlight – making it especially effective on fingerprints, water spots, bird droppings, bugs, and light dirt. It won't streak or leave a residue and it works great on painted surfaces, stainless steel, chrome, fiberglass, plastic, rubber, vinyl, and glass.

ITEM	CONTAINER SIZE
MCNH7203	16 oz / 454 g



Micro Fiber Cloth

Micro Fiber Cloths are made from synthetic materials and clean surfaces much more effectively than cotton.

ITEM	CONTAINER SIZE
MCNH7204	—

ELECTRICAL PRODUCTS

Clean & Protect

Irongard™ battery cleaner dissolves and removes corrosion from battery connectors, cables, fasteners and hold-downs, while neutralizing battery acid. Cleaner changes color, when the cleaning is complete. Once the battery is clean, protect the battery from corrosion, with Irongard Battery Saver. Application seals out acid fumes, moisture and dirt, while helping to prevent acid shorts.

Clean electrical parts and contacts, with Irongard Contact cleaner. Can be used as a final wash before assembly.



Battery Cleaner

CNH Industrial Genuine Parts Battery Cleaner is an amazingly easy way to remove corrosion from all battery parts. Use to neutralize acid and dissolve corrosion from terminals, cable, hold-downs and boxes. Recommended for all tractors, harvesters, forage and industrial and construction equipment batteries. The color change indicates when the cleaning is complete. No guesswork involved.

ITEM	CONTAINER SIZE
B505514	12 oz / 340 g



Battery Saver

CNH Industrial Genuine Parts Battery Saver provides a protective coating that prevents the formation of damaging corrosion. Keeps dirt and other contaminants from interfering with the flow of power. Prolongs battery, cable and clamp life. Recommended for use with CNH Industrial Genuine Parts Battery Cleaner.


ITEM	CONTAINER SIZE
B505515	12 oz / 340 g



Electrical Contact & Parts Cleaner

Fast-evaporating, heavy-duty cleaner removes oil, grease and other contaminants from electrical parts and mechanical equipment. Can be used on hard surfaces including metal associated with electrical and electronic parts. Use as a final wash before assembly – improves gasket, sealant and paint adhesion.

Suggested Applications: Switches, relays, motor controls, connectors and sensors.

	ITEM	CONTAINER SIZE
	B505513	11.5 oz / 326 g



SEED LUBRICANTS

Seed lubricants from Irongard™ provide double-edged protection that ensures optimum seed counts for maximum yields. Applied to the seed tank, inductor, hoppers, delivery lines and seed tube, our lubricants increase seed delivery consistency and constant plant spacing. Plus, they provide optimum seed drying capabilities and control static electricity to minimize clumping. All this while reducing wear and keeping components running longer.



Graphite Seed Flow

Graphite Seed Flow helps seed flow smoothly in planter hoppers and lubricates planter mechanisms. Developed for Cyclo® planters, but this graphite lubricant can be used in other planters as well. Convenient shaker can provide a light covering over bottom of hopper and its working parts. Directions: Fill hopper halfway and shake to add another light covering. Continue filling the hopper with seed and give final light graphite covering over the top. One can contains enough lubricant to treat 42 bushels of seed corn. Dispensing cap sold separately.

ITEM	CONTAINER SIZE
407486R1	1 lb Shaker Bottle / 454 g
73340733	8 lb Bottle with Optional Dispensing Cap



Talc/Graphite Seed Flow

50/50 blend of Talc and Graphite. Talc/Graphite Seed Flow helps seed flow smoothly in planter hoppers and lubricates planter mechanisms. Reduces seed bridging and also reduces the planter plate wear. Dispensing cap sold separately.

ITEM	CONTAINER SIZE
73340370	1 lb Shaker Bottle / 454 g
73340734	8 lb Bottle with Optional Dispensing Cap



Dispensing Cap

Dispensing cap is designed to fit the 8 lb Graphite and Graphite/Talc Seedflow containers. This unique cap takes the mess out Graphite dispensing and delivers an exact amount of product each time. A simple half turn of the cap handle dispenses the product efficiently – without waste, or worry about spillage – in the field. Cap is re-usable.

ITEM	CONTAINER SIZE
73340918	Dispensing Cap



Non-Stick Graphite Lubricant

Non-Stick Graphite lubricants can be sprayed, brushed or rolled onto any metal or wood surface to reduce sliding friction. Can be used as a lubricant on chains, sprockets, hitches, over-head door tracks, winches and hinges. Use Non-Stick Graphite for seed drum seal wearing ring and market alternator of Cyclo® planters.

Also, as a surface conditioner on gravity boxes, hoppers, chutes, moldboards, planters and markers, forage boxes and wagon beds. Non-Stick Graphite lubricants are the most effective products to prevent hang-up of high moisture grain in hoppers and gravity boxes. Protects metal against rust and corrosion.

ITEM	CONTAINER SIZE
1131916R1	1 gal / 3.78 L
547596R1	1 qt / 946 ml
407408R1	12 oz / 340 g



Bayer Fluency Agent

Fluency Agent Advanced is an alternative to talc, graphite or talc-graphite blend seed lubricants. In some areas, when using a seed lubricant with neonicotinoid treated seed only a dust-reducing fluency agent may be permitted. Fluency Agent Advanced seed flow additive can be used and has a CNH Industrial recommended application rate of 1/8 cup per 2 units of seed.

Fluency Agent Advanced:

- Reduces the dust and active ingredient that can potentially be released during planting, reducing the risk to pollinators.
- Has less residue buildup in the seed hopper, making for easier cleanup.

ITEM	CONTAINER SIZE
73343904	4.5 lb pail

LUBRICANTS

Anti-Seize & Lubricants

Check out the wide variety of lubricants and anti-seize compounds available.



EP Gear Grease

CNH Industrial Genuine Parts EP Gear Grease is recommended for use in all gearboxes on implements and is identified in the operator's manuals. Lubricant is an extreme pressure semi-fluid, lithium 12 hydroxystearate, soap-based grease and contains an unleaded EP/anti-wear additive and rust corrosion inhibitors. Semi-fluid grease consists of oils containing a small amount of soap thickener, that impart the general appearance of a very soft grease while retaining the fluid characteristics of a very heavy or viscous oil. Although its semi-fluid consistency minimizes leakage through worn or damaged seals, it has superior adhesion to gears and bearings without adhering to gear case walls. Its consistency ensures immediate rewetting of critical wear points. Safe to use with bronze or brass bushings and gears. Can be used in industrial applications where conventional gear oils cannot, because of worn or missing seals.

ITEM	CONTAINER SIZE
9821006	32 oz / 946 ml



Industrial-Strength Rust Penetrant

Penetrates to loosen rusted nuts and bolts quickly. Protects against rust and corrosion. Penetrates and lubricates.

Suggested Applications: Construction equipment, farm equipment and industrial machinery.

ITEM	CONTAINER SIZE
B505501	12 oz / 340 g



Heavy-Duty Silicone Lubricant

Superior lubricant that weather-proofs and protects. Works on metals, rubber and canvas. Reduces friction.

Suggested Applications: Lawn mowers, snow shovels, wood drawers, sliding doors and windows.

ITEM	CONTAINER SIZE
B505503	12 oz / 340 g



Anti-Seize Lubricant

A high-performance lubricant that keeps parts free from seizure due to high heat or corrosive atmospheres. Reduces galling of press fitted parts.

Suggested Applications: Exhaust fasteners, turbo charge fasteners and wheel nuts.

ITEM	CONTAINER SIZE
ZPX76716	16 oz / 454 g
B505504	12 oz / 340 g



Penetrating Oil

Loosens rusted parts. Prevents corrosion on tools and other parts. Dries out wet engine parts. Stops binding and squeaks.

ITEM	CONTAINER SIZE
 B505502	12 oz / 340 g



White Lithium Grease

CNH Industrial Genuine Parts White Grease is an aerosolized lithium complex grease, which has exceptional resistance to water and evaporation. Provides good lubrication and reduces friction. Sprays into hard-to-reach places without wash-offs. Helps stop rust and corrosion. Not affected by normal hot and cold temperature extremes.

Suggested Applications: Slides, hinges and latches, chains, rollers bearings, gears and winches.

ITEM	CONTAINER SIZE
ZRG012WGC	12 oz / 340 g



Chain & Cable Lube

For use on construction and agricultural equipment. Helps protect against rust and corrosion. Fast penetrating action. Reduces chain wear. Resists high temperature breakdown. Heavy viscosity reduces throw-off. Increases life of chain and cables.

ITEM	CONTAINER SIZE
B505500	12 oz / 340 g



Wheel Bearing Grease

Composed of EP Grease. Acid, salt and alkali resistant. Water resistant to keep parts lubricated. Formulated to withstand high temperatures.

ITEM	CONTAINER SIZE
B505497	1 lb / 454 g



Friction Modifier

CNH Industrial Genuine Parts Friction Modifier reduces noise from rear axles and supplements sulfur-phosphorus gear oil additives. See Operator's Manual for specific instructions. Reduces friction in gear boxes. Reduces heat build up.

ITEM	CONTAINER SIZE
9706315DS	16 oz / 473 ml



Gear Oil

High-quality gear oil for gearboxes requiring ISO 220 or AGMA grade 5-gear oil. Gear oil has a tackifier to help the gear oil stick to gears. Suitable for gear boxes containing brass or bronze components.

ITEM	CONTAINER SIZE
86520567DS	32 oz / 946 ml



Bar and Chain Oil

Provides maximum engine power, low friction, and faster cutting time. High film strength prevents wear or scuffing of chain links and bars while protecting metal parts against corrosion and rust.

ITEM	CONTAINER SIZE
MC50BCO	1 gal / 3.784 L

STARTING FLUIDS

Irongard™ Premium Starting Fluid is 70% ether, more than triple the industry standard of 20% ether. Use this product for faster cold-weather engine starts, saving time, battery and cylinder wear.



Premium Starting Fluid

Full 70% ether content for quicker engine starts. For use with gasoline and diesel engines. Extends starter and battery life with quicker starts. Contains upper cylinder lubricant and corrosion inhibitor. For use on trucks, tractors and construction equipment. Not for use with pre-heat manifolds or glow plugs.

ITEM	CONTAINER SIZE
ZAD4	11 oz / 312 g
ZAD6	7.4 oz / 210 g



FUEL TREATMENTS

Irongard™ Fuel Conditioners are designed to treat or prevent a variety of diesel fuel issues, from cold weather gelling, to algae growth, or just improved overall diesel fuel quality and lubricity.



Diesel Fuel Conditioner

CNH Industrial Genuine Parts Diesel Fuel Conditioner is especially formulated for use with the low-sulfur diesel fuels. This additive will increase the lubricity of diesel fuels and prolong injector pump life. One 16-oz can treats 60 gallons. One 32-oz can treats 120 gallons. Sulfur content of less than 5 ppm makes it safe for ultra-low sulfur diesel fuels.


ITEM	CONTAINER SIZE
ZRG016LSC	16 oz / 473 ml
ZRG032LSC	32 oz / 946 ml



Diesel Fuel Anti-Gel

CNH Industrial Genuine Parts diesel fuel anti-gel is a special blend of additives designed to reduce fuel problems related to cold temperatures. Will also help maintain fuel system and injector cleanliness, and prevent fuel oxidation or system corrosion.

ITEM	CONTAINER SIZE
ZRG015GELC	15 oz / 444 ml

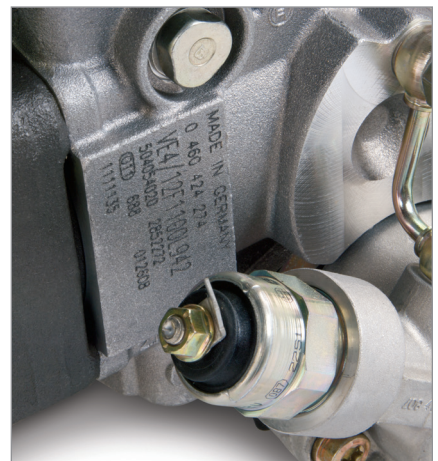

RADIATOR PRODUCTS

Repair & Prevention

Repair or prevent costly cooling system failures with Irongard™ Radiator Stop Leak.



Radiator Stop Leak

Helps seal small leaks quickly. Helps prevent new leaks. Stays safely in suspension until a leak occurs.

ITEM	CONTAINER SIZE
B505508	12 oz / 355 ml



HYDRAULIC PRODUCTS

Repair & Prevention

Irongard Hydraulic Oils are engineer approved for high performance and continued mechanical reliability.



Hydraulic Brake Oil

For use in CNH Industrial Genuine Parts tractor hydraulic clutch and brake systems. This hydraulic oil is NOT COMPATIBLE with brake system rubber component parts designed to be used with DOT type brake fluids. See operator's manual for specific instructions.

ITEM	CONTAINER SIZE
73340450	32 oz / 946 ml



Hydraulic Brake Oil-LHM Fluid

Material Spec MAT3630, LHM fluid, meets ISO spec 7308. This hydraulic oil is NOT COMPATIBLE with brake system rubber component parts designed to be used with DOT type brake fluids.

ITEM	CONTAINER SIZE
86541699DS	32 oz / 946 ml

ADHESIVES

Epoxy Adhesives

Advanced epoxy adhesives from Irongard™ are used for structural bonding, potting and encapsulating, and come in a variety of cure times and package sizes.



Devcon® Plastic Welder™

Toughened straw-colored adhesive for bonds to engineered plastics such as ABS, PVC, metals and composites.

ITEM	CONTAINER SIZE
ZPX14300	25 ml



Devcon 5 Minute® Epoxy Amber

Rapid curing, general purpose, amber-colored adhesive/encapsulant that bonds metals, wood and ceramic.

ITEM	CONTAINER SIZE
ZPX14250	25 ml



GASKETING

Gasket Makers

Irongard™ gasket makers offer significant performance advantages which include superior oil resistance, superior torque retention, along with high-temperature resistance.



The Right Stuff® Gasket Maker

Makes high-performance black elastomeric rubber gaskets in one minute. Non-corrosive, with superior flexibility and adhesion. Equipment can be returned to service immediately. Blowout resistant and outperforms precut gaskets. Temperature resistant to 500°F.

Suggested Applications: Construction equipment, farm equipment and industrial machinery.

ITEM	CONTAINER SIZE
ZPX25223	4 oz / 113.4 g



Permatex® Form-A-Gasket #2 Sealant

Reliable, paste-like gasket sealant/dressing/coating. Sets slowly to a pliable film best suited for non-rigid, vibrating assemblies. Resists fuels and other solvents. For use in applications to 400°F.

Suggested Applications: Coating cut gaskets to hold in place and improve sealing.

ITEM	CONTAINER SIZE
ZPX80500	80 ml



Permatex Aviation Form-A-Gasket #3 Sealant

A brushable, non-hardening gasket dressing and sealant that holds gaskets in place. Dries slowly to a pliable form. Sealer for use with close fitting parts. Resistant to gasoline and other solvents. Suitable for continuous temperatures of 400°F.

Suggested Applications: Gasket coating or sealing close fitting parts, water pump gaskets, oil pan gaskets, timing gear covers and coolant hose connections.

ITEM	CONTAINER SIZE
ZPX18130	16 oz / 473 ml



High-Temperature Anaerobic Gasket Maker

A high-temperature sealant specifically engineered for making or dressing gaskets in rigid assemblies. Able to withstand temperatures to 400°F (204°C), fills gaps to 0.010" (0.254mm) and permits clamping loads to be maintained for strong leak-proof assemblies.

Suggested Applications: Sealing rigid, flat machined metal surfaces.

ITEM	CONTAINER SIZE
ZPX51050	1.69 fl oz / 50 ml



Anaerobic Flange Sealant

Flexible, gasketing material for use on rigid assemblies and machined flanges with less than .015" gap. OEM approved. Eliminates precut, preformed, paper and rubber cut gaskets. Flexes with flanges that move in service.

Suggested Applications: As specified in CNH Industrial Genuine Parts service manuals to seal flanged assemblies.

ITEM	CONTAINER SIZE
ZPX51530	10.1 fl oz / 300 ml
ZPX51550	1.69 fl oz / 50 ml

Anaerobic Gasket Maker

Ideal for on-the-spot and emergency repairs, or when a conventional gasket is not available. Seals to 300°F (149°C), fills gaps to 0.050" (1.27mm). Can be used on a variety of metal surfaces including aluminum. Forms a flexible, solvent-resistant seal that will not tear or decay. Parts disassemble easily even after extended service and old gasket material can be removed in minutes with a putty knife.

Suggested Applications: Sealing flexible metal assemblies.

ITEM	CONTAINER SIZE
ZPX51850	1.69 fl oz / 50 ml



CNH Industrial Irongard™ Branded Thread Sealants/Gasketing

PRODUCT	ITEM NO.	CONTAINER SIZE	COLOR	VISCOSITY CP	SEAL TO OPERATING PRESSURE	TEMPERATURE RANGE	SPECIFIC GRAVITY
High-Temperature Anaerobic Gasket Maker	ZPX51050	50 ml tube	Red	288,000	1-12 hrs	-65°F to 400°F	1.08
Anaerobic Flange Sealant	ZPX51550 ZPX51530	50 ml tube 300 ml cart	Purple	275,000	1-12 hrs	-65°F to 300°F	1.10
Anaerobic Gasket Maker	ZPX51850	50 ml tube	Red	750,000	4-24 hrs	-65°F to 300°F	1.13
High-Temperature Thread Sealant	ZPX59250	50 ml tube	White	350,000	24 hrs	-65°F to 400°F	1.21

GASKETING

RTV

Irongard™ RTV silicone products offer a wide temperature rating while providing excellent sealing and bonding properties, along with oil resistance.



Red RTV Silicone

A high-temperature RTV silicone suited to form in place gasket applications subjected to temperatures up to 650°F intermittent. Sensor-safe.

Suggested Applications: Use where RTV silicone is specified in high-temperature or heavy-duty applications.

ITEM	CONTAINER SIZE
ZPX30564	7.25 oz Power Can / 205 g
ZPX81160	3 oz / 85 g



Clear RTV Silicone Adhesive Sealant

An all-purpose RTV adhesive and sealant for a variety of bonding and sealing jobs. Clear formulation makes it particularly well suited for jobs that require a neat, cosmetic appearance.

Suggested Applications: Windshield frames, lights and cable panels.

ITEM	CONTAINER SIZE
ZPX80050	3 oz / 85 g
ZPX30562	7.25 oz Power Can / 205 g
ZPX80855	10.1 fl oz / 300 ml



Black RTV Silicone Adhesive Sealant

An all-purpose RTV silicone adhesive/sealant suited for a wide variety of indoor and outdoor sealing, bonding and weatherproofing uses. Cures into a flexible sealant that will not harden or crack over time.

Suggested Applications: Engine covers, front wheel assist covers, sheet metal covers, caulk joints and seal. Electrical boxes, seal electrical terminals and bond insulations.

ITEM	CONTAINER SIZE
ZPX81158	3 oz / 85 g



Ultra Black® Gasket Maker

Fast curing, sensor-safe, low-odor and non-corrosive, Ultra Black meets performance specs of OE silicone gaskets. Retains high-flexibility and oil-resistance properties through use of a patented adhesion system. Temperature range 500°F (260°C) intermittent.

Suggested Applications: Pump housings, machine tools, compressors, gearboxes, valve covers, oil pans and transmission pans.

ITEM	CONTAINER SIZE
ZPX82180	3.35 oz / 95 g



Permatex® Ultra Grey® Gasket Maker

Designed for high-torque applications requiring a unique RTV gasket. Fills gaps of up to 0.25" when fully cured. Exceeds manufacturer's performance requirements. Low odor, non-corrosive. Outstanding oil and coolant resistance. Temperature range of -65°F to 650°F intermittent; resists shop and auto fluids and vibration.

Suggested Applications: Pump housings, machine tools, compressors, gearboxes, valve covers, oil pans and transmission pans.

ITEM	CONTAINER SIZE
ZPX18572	80 ml



Ultra Blue® Gasket Maker

A high-performance RTV silicone well suited for a wide variety of gasketing uses. It is 3 times more oil resistant than standard RTV's. Outstanding oil resistance and flexibility. Eight times more flex than cork or composite gaskets. Sensor-safe and non-corrosive.

Suggested Applications: Use where a non-corrosive RTV is required and where maximum hot oil resistance is desired.

ITEM	CONTAINER SIZE
ZPX81724	3.35 oz / 95 g
ZPX85519	9.5 oz Power Can / 269 g



THREADLOCKERS

Liquid Threadlockers... Providing Threaded Fastener Reliability

Irongard™ Liquid Threadlockers are superior to conventional lock washers, nylon inserts, and other mechanical devices because they secure the entire fastener assembly against loosening from shock or vibration and maintain fastener clamping forces. Threadlockers also seal the threads against leakage and prevent rust and corrosion. Available in a variety of strengths and temperature ranges, threadlockers remain the most reliable way to lock and seal threaded fasteners of all shapes and sizes, either before or after assembly.




Medium Strength Threadlocker Blue


This blue, general-purpose threadlocker, locks and seals threaded parts. Use on nuts, bolts and screws. Ensures that parts do not loosen prematurely due to shock and vibration. Medium strength allows easy removal.

Suggested Applications: Lock and seal hydraulic pump screws, parking brake bolts, transmission case cover bolts. Lock seat bracket bolts, retain axle seals and planet pins end covers.

ITEM	CONTAINER SIZE
ZPX24210	.34 fl oz / 10 ml
ZPX24236	1.22 fl oz / 36 ml



VS.



CNH Industrial Genuine Parts Liquid Threadlocker

Entire threaded area filled with threadlocker. ONE DROP FITS ALL! Threads sealed – moisture can't get inside.

Lock Washer

Contact only under bolt – bolt can vibrate loose. Must use right size. Threads open – moisture can get in causing corrosion.

CNH Industrial Irongard Branded/Permatex® Liquid Threadlockers

PRODUCT	ITEM NO.	CONTAINER SIZE	TYPICAL USE	COLOR	VISCOSITY CP	BREAK/PREVAL TORQUE IN-LBS ¹	TEMPERATURE RANGE	FIXTURE TIME ² / FULL CURE	FIXTURE WITH PRIMER	SPECIFIC GRAVITY
Irongard Medium Strength Threadlocker Blue	ZPX24210	10 ml bottle	1/4" to 3/4" (6-20mm)	Blue	1,200/6,000 Thixotropic	115/53	-65°F to 300°F (-54° to 149°C)	20 min/ 24 hrs	5 min	1.00
	ZPX24236	36 ml bottle								
Irongard Surface Insensitive Threadlocker Blue	ZPX24310	10 ml bottle	1/4" to 3/4" (6-20mm)	Blue	2,250/12,000 Thixotropic	180/62	-65°F to 300°F (-54° to 149°C)	20 min/ 24 hrs	5 min	1.08
Irongard Permanent Strength Threadlocker Red	ZPX26210	10 ml bottle	3/8" to 1" (10-25mm)	Red	1,800/5,000 Thixotropic	189/275	-65°F to 300°F (-54° to 149°C)	20 min/ 24 hrs	5 min	1.10
	ZPX26236	36 ml bottle								
Irongard High Strength Threadlocker Red	ZPX27110 ZPX27136	10 ml bottle 36 ml bottle	3/8" to 1" (10-25mm)	Red	500	230/225	-65°F to 300°F (-54° to 149°C)	20 min/ 24 hrs	5 min	1.10
Irongard Large Diameter Threadlocker Red	ZPX27736	36 ml bottle	1" & greater (25mm+)	Red	7,000	250/200	-65°F to 300°F (-54° to 149°C)	60 min/ 24 hrs	5 min	1.12
Penetrating Grade Threadlocker Green	ZPX29050	50 ml bottle	#2 to 1/2" (2.2-12mm)	Green	12	90/310	-65°F to 300°F (-54° to 149°C)	20 min/ 24 hrs	5 min	1.08

¹.375" x 16 phosphate steel

²Fixture strength is equivalent to 20% of full cure strength



Surface Insensitive Threadlocker Blue

A removable strength, general-purpose threadlocking adhesive especially well suited for fasteners between 1/4" and 3/4" diameter (6 to 20mm). Applied to threaded components before assembly, surface insensitive has controlled lubricity for accurate clamp loads. Parts can be separated using hand tools.

Suggested Applications: Machine tools, presses, pumps, compressors, mounting bolts, gear boxes and where specified in service manuals.

ITEM	CONTAINER SIZE
ZPX24310	.34 fl oz / 10 ml



High Strength Threadlocker Red

A high-strength adhesive to lock and seal threads when maximum locking strength is required. Designed for large fasteners between 3/8" and 1" and permanent assemblies. Heat parts to 450°F to disassemble.

Suggested Applications: Lock and seal PTO return spring bolt, lock and seal tractor roller cap screws, lock wheel studs.

ITEM	CONTAINER SIZE
ZPX27110	.34 fl oz / 10 ml
ZPX27136	1.22 fl oz / 36 ml



Large Diameter Threadlocker Red

A high-strength adhesive for locking and sealing large bolts and studs 1" or larger in diameter. Heat may be required to weaken bond before parts can be disassembled. Disassemble while hot (450°F).

Suggested Applications: Frame brackets, suspension fasteners, shock absorber mounts and wheel studs.

ITEM	CONTAINER SIZE
ZPX27736	1.22 fl oz / 36 ml



Permanent Strength Threadlocker Red

A high-strength adhesive to lock and seal large threads where lubricity for controlled torque tension is required. Apply to fasteners between 3/8" and 1" in size before assembly. Disassemble while hot (450°F).

Suggested Applications: Lock and seal high-strength bolts as specified in service manuals. All fasteners that must withstand heavy shock, vibration or extreme chemical or environmental conditions.

ITEM	CONTAINER SIZE
ZPX26210	.34 fl oz / 10 ml
ZPX26236	1.22 fl oz / 36 ml

Permatex® GEL TWIST™ Threadlockers

PRODUCT	ITEM NO.	CONTAINER SIZE	TYPICAL USE	COLOR	VISCOSITY CP	BREAK/PREVAIL TORQUE IN-LBS ¹	TEMPERATURE RANGE	FIXTURE TIME ² / FULL CURE	SPECIFIC GRAVITY
Permatex Medium Strength Threadlocker Blue Gel	ZPX24010	10 g Gel TWIST™ Applicator	1/4" to 1" (6-25mm)	Blue	75,000/900,000 Thixotropic	115/53	-65° to 300°F (-54° to 149°C)	15 min/24 hrs	1.15
Permatex High Strength Threadlocker Red Gel	ZPX27010	10 g Gel TWIST™ Applicator	3/8" to 1" (10-25mm) & greater	Red	75,000/900,000 Thixotropic	175/230	-65° to 300°F (-54° to 149°C)	15 min/24 hrs	1.13



Permatex Penetrating Grade Threadlocker Green

A low-viscosity, thread-locking liquid, that wicks along the threads of pre-assembled fasteners to secure them in place. For use on small, reassembled fasteners (up to 1/2"). Localized heat and hand tools are required for disassembly.

Suggested Applications: Set screws, adjustment screws, pre-assembled fasteners, electrical connectors and carburetor adjustment screws.

ITEM	CONTAINER SIZE
ZPX29050	1.69 fl oz / 50 ml



Permatex High Strength Threadlocker Red Gel

A high-strength threadlocker red gel for heavy-duty applications. Ideal for reliably securing all nut and bolt applications 3/8" to 1".


ITEM	CONTAINER SIZE
ZPX27010	10 g



Permatex Medium Strength Threadlocker Blue Gel

All purpose strength threadlocker gel that reliably secures all nut and bolt applications 1/4" to 1".

ITEM	CONTAINER SIZE
ZPX24010	10 g

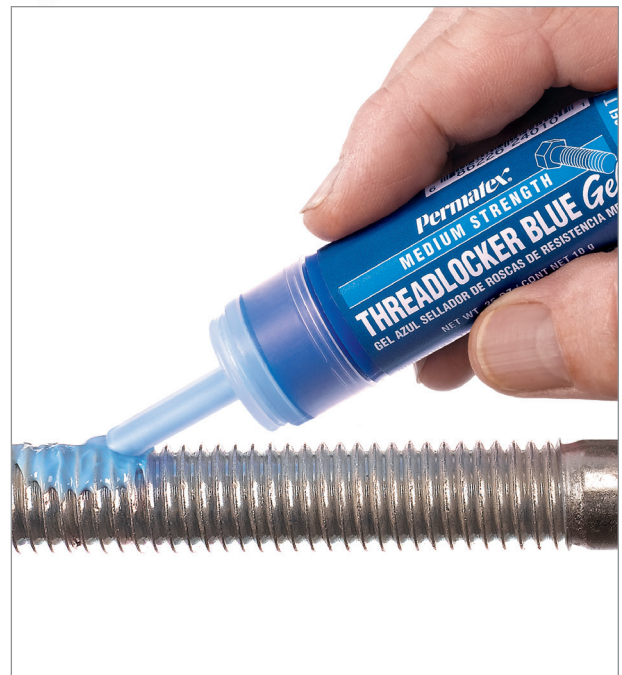

¹ .375" x 16 phosphate steel

² Fixture strength is equivalent to 20% of full cure strength

THREAD SEALANTS

Irongard™ Thread Sealants seal and secure metal pipes and fittings. By filling the space between threaded metal parts. Thread sealants prevent leakage caused by vibration loosening, tape shredding, solvent evaporation, damaged threads and temperature cycling. Designed for low-and-pressure applications, Thread sealants seal instantly for online low-pressure testing. When fully cured, they seal to burst strength of most piping systems. The high lubricating properties of Irongard Thread Sealants ease assembly and prevent galling of the threads. For system repairs, parts may be disassembled with basic hand tools.

High-Temperature Thread Sealant

A high-performance sealant that seals threaded metal fittings instantly. Lubricates for easy assembly and cures to lock against vibration loosening. Outperforms Teflon tape, will not shred.

Suggested Applications: Tapered pipe threads, pipe plugs, fuel line fittings, hydraulic fittings, air line fittings, and brake and power steering fittings.

ITEM	CONTAINER SIZE
ZPX59250	1.69 fl oz / 50 ml



BEARING MOUNTS

Irongard™ Retaining Compounds are designed to bond non-threaded, cylindrical, metal assemblies by filling the voids between close-fitting metal parts. Retaining compounds harden to create a solid, one-piece assembly and can be used to lock keyways, secure splines, augment press fits and strengthen interference fits. Use them to prevent wear on new components, or restore the fit to worn or out-of-tolerance parts. Retaining compounds seal joints against leakage and prevent fretting and corrosion. Formulated in a variety of viscosities, strength characteristics, gap-filling abilities, and temperature ranges, Irongard Retaining Compounds can solve even the most difficult retaining applications.



Retaining Compound For Close Fits

A high-strength sealant that retains and seals cylindrical assemblies. Increases the holding strength of press fits and retains slip fits. For use on bearings, bushings, sleeves, keyways and splines.

Suggested Applications: Clutch hub to piston carrier, engine block heaters, engine plug hubs, oil seals, bushings, bearings, ring gear bolts and differential lock pins.

ITEM	CONTAINER SIZE
ZPX60936	1.22 fl oz / 36 ml



Retaining Compound For Relaxed Fits

A high-strength, room-temperature curing adhesive used to join fitted cylindrical parts. It fixtures in 10 minutes and provides shear strength of 4000 psi in 24 hours. Capable of filling diametrical gap clearances up to 0.010" (0.27mm).

Suggested Applications: Gears, wheels, pulleys, cams, collars, flywheels, sprockets and rotors to shafts.

ITEM	CONTAINER SIZE
ZPX68036	1.22 fl oz / 36 ml

CNH Irongard Branded Retaining Compounds

PRODUCT	ITEM NO.	CONTAINER SIZE	COLOR	MAXIMUM DIAMETRICAL GAP FILL	VISCOSITY CP	SHEAR STRENGTH PSI	TEMPERATURE RANGE	FIXTURE TIME/FULL CURE (ON STEEL)	SPECIFIC GRAVITY
Bearing Mount For Close Fits	ZPX60936	36 ml bottle	Green	.005"	125	1-12 hrs	-65°F to 300°F (-54° to 149°C)	10 min/24 hrs	1.10
Bearing Mount For Relaxed Fits	ZPX68036	36 ml bottle	Green	.015"	350,000	1,250	-65°F to 300°F (-54° to 149°C)	10 min/24 hrs	1.10

MISCELLANEOUS PRODUCTS

Preserve & Protect

Irongard™ offers a wide assortment of products to preserve your equipment for longer life and less downtime.



Heavy-Duty Brake Fluid

DOT 3 450°F Brake Fluid for drum and disc brakes. Meets or exceeds SAE and federal specifications.

ITEM	CONTAINER SIZE
B505499	12 oz / 355 ml



Sanden SP-15

Polyalkylene glycol fluid. R134A compressor lubricant. See operator's manual for specific instructions.

ITEM	CONTAINER SIZE
73341634	8.45 oz



HD Allison Transmission Oil

HD Synthetic ATF is a fully synthetic fluid recommended by Allison Transmission, Inc. approved against the Allison TES-295 Specification. The fluid is designed to meet the demanding requirements of modern heavy duty automatic transmissions. The synthetic base oil composition enables excellent performance even in some of the harshest of operating conditions. It offers outstanding gear shifting and power transfer performance. Versus conventional ATF fluids, the inherently high viscosity index and stability of HD Synthetic ATF protects against thermal breakdown at high operating temperatures, while still providing outstanding performance at sub-zero temperatures.

ITEM	CONTAINER SIZE
MC295HDD	1 gal / 3.784 L



Belt Dressing

CNH Industrial Genuine Parts Belt Dressing is designed to soften and lubricate belts. Reduces slippage and improves transfer of power. Prevents premature failure caused by belt slippage.

ITEM	CONTAINER SIZE
ZRG011BELC	11 oz / 312 g



Anti-Chatter Additive

See operator's manual for specific instructions. Stops wet brake chatter.

ITEM	CONTAINER SIZE
251403	64 oz / 1.92 L



Fiber Tip Paint Marker Set

Pack comes with black, yellow and white paint markers used for a variety of applications.

ITEM	CONTAINER SIZE
MCNH7200	Set / 5 oz tubes



Drivetrain Fluid

Meets CAT TO-4 Specification. This fluid can be used in applications requiring an SAE50 TO-4 drivetrain fluid SAE50.

ITEM	CONTAINER SIZE
MC50WHD	1 gal / 3.784 L



Synthetic Power Steering Fluid

Add to power steering reservoir as needed. Suitable for all climates, including cold, northern climates. See operator's manual for specific instructions. Used for transmission, hydraulic, and differential fluids.

ITEM	CONTAINER SIZE
THDSS	32 fl oz / 946 ml

Meets the following specs:

BRAND	SPECS
John Deere	J20C, J20D
AGCO	Improved Power Fluid 821XL
Ford/New Holland	ESN-M2C134-D; FNHA-2-C-201, FNHA-2-C-200
Massey Ferguson	M1135, M1141, M1127, M1129A
White Farm Equipment	Q-1826
Case Corporation	JIC-143, JIC-145; MS 1206, MS 1207, MS 1209, MS 1210 (TCH)
Oliver	Type 55
Minneapolis	Moline Fluids
Caterpillar	TO-2
Renk	Bus ATF 873, 874 A/B
Kubota	Super UDT, UDT
International Harvester	B6
Deutz	Allis 821XL



Tire Sealant 1 Gallon Pump Bottle

Tire sealant helps prevent and repair flats in tubeless tires when a puncture occurs. Sealant is forced into the opening and seals the puncture. Comes in a 1 gallon bottle and includes a pump for convenience.

ITEM	CONTAINER SIZE
MC4001	1 gal / 3.784 L



Premium Marking Foam

Premium Marking Foam Concentrate creates thick, long-lasting white foam to clearly mark the area you've sprayed so you can avoid expensive overlaps. The high-expansion formula is specially designed for pressurized marking systems.

ITEM	CONTAINER SIZE
MC7000GL	1 gal / 3.784 L



Power Steering Fluid

Add to power steering reservoir as needed. Not for use in temperatures below zero degrees Fahrenheit (0°F). See operator's manual for specific instructions.

ITEM	CONTAINER SIZE
73340638	32 fl oz / 946 ml



Tilcoat

Specialized oil-based coating designed to protect valuable field equipment during non-use periods. Product is formulated to release from tillage tools upon their insertion and use in the ground. Lead-free formula that dries to a non-toxic film and provides short term protection. Fast scouring, resists rust and easy application.

Suggested Applications: Tillage equipment, mould boards, plow shares, disks, sweeps and shovels.

ITEM	CONTAINER SIZE
1132221N	12 oz / 340 g
991049R2	1 qt / 946 ml
1131548R2	1 gal / 3.78 L



Paint Hardener

Cures paint faster and harder, creating less machine downtime. Enhances gloss, appearance, durability, and chemical resistance. Not VOC regulation compliant. We cannot ship this product to California, Delaware, Maryland or Canada.

ITEM	CONTAINER SIZE
REN3001	16 oz / 454 g

PAINT CHARTS

One stop shop to get your Case IH, CASE, New Holland and Kobelco paints to match your equipment. Order these parts along with all of your Irongard™ maintenance solutions and chemicals available now from your locate CNH Industrial Genuine Parts dealer. Low VOC liquid paints are required by law in Canada, California, Maryland, and Delaware.

Agriculture Enamel Paint Chart

HIGH PERFORMANCE			COLOR	PART NO. PER SIZE				
MAKE	MODEL	YEAR	NAME	SPRAY	QUART	GALLON	FIVES	LOW VOC
IH	All	1969 – 1981	2150 Red	991012N	991010R2LF	B90882LF	—	991010R2LFVOC (qt.) B90882LFVOC (gal.)
Case IH/IH	All	1961 – Current	MS 3 Gloss Red	B17566N	B17564	B17562	B504438	B17564VOC (qt.) B17562VOC (gal.)
IH	All	1969 – 1981	935 White	991115N	991116R2	B90888	—	991116R2VOC (qt.)
Case IH/IH	All	1988 – 1999	MS 45 Non-Glare Black	990121N	1132129R1	B90886	—	1132129R1VOC (qt.)
Case IH/IH	All	2000 – Current	CNH Industrial Genuine Parts Dark Gray	B96104	B96105	B96106	—	B96105VOC (gal.)
Case IH/IH	All	1961 – Current	MS 19 Silver	—	B17565	B17563	—	B17565VOC (qt.)
IH	All	1981 – 1988	MS 50 Gloss Black	B17680N	B17681	B17682	—	B17681VOC (qt.) B17682VOC (gal.)
CASE	All	Pre – 1973	MS 6 Desert Sunset	B17650N	B17651LF	B17652LF	—	B17651LFVOC (qt.)
CASE	All	1974 – 1985	MS 2 Power Red	B17670N	B17671LF	B17672LF	—	B17671LFVOC (qt.)
CASE	All	1974 – 1985	MS 7 Power White	B17655N	B17656	B17657	—	B17656VOC (qt.)
Steiger	All	All Green Models	Green	1132224N	—	1131611R1LF	—	—

STANDARD			COLOR	PART NO. PER SIZE				
MAKE	MODEL	YEAR	NAME	SPRAY	QUART	GALLON	LOW VOC	
Versatile	All	All	Red	99000330DS	—	99000332DS	—	
Versatile	All	All	Yellow	99000333DS	99000334DS	—	—	
Ford	Tractors	1939 – 1962	Gray	M1J957SE5DS	M1J957SE2DS	M1J957SE3DS	M1J957SE2DSVOC (qt.)	
Ford	Tractors	1965 – 1994	Gray	M20J1750SE5DS	M20J1750SE2DS	M20J1750SE3DS	20J1750SE2DSVOC (qt.)	
Ford	Tractors	1939 – 1962	Red	M1J956SE5DSL	M1J956SE2DSL	M1J956SE3DSL	—	
Ford	Tractors	1979 – Current	Black (Flat)	M1724GSE5DS	M1724GSE2DS	—	—	
Ford	—	1975 – 1980	White	M1619ASE5DS	M1619ASE2DS	—	—	
Ford	—	1974 – 1980	Consumer White	M1525ASE5DS	M1525ASE2DS	—	—	
Ford/New Holland	Tractors	1963 – 1999	Blue	9613385DS	9613386DS	9613387DS	9613387DSVOC (gal.) 9613386DSVOC (qt.)	
Ford/New Holland	Tractors	1994 – 1999	Chassis Gray	9624696DS	9624697DS	9673509DS	9624697DSVOC (qt.)	
Ford/New Holland	Tractors	1994 – Current	Blanco White	9624698DS	9624699DS	—	9624699DSVOC (qt.)	
Ford/New Holland	Tractors	1999 – 2000	Gray Ral 7024	86109004DS	86109005DS	86109006DS	—	
New Holland	Hay & Forage	All	Red	70780DS	70365DS	70036DS	70036DSVOC (gal.) 70365DSVOC (qt.)	
New Holland	Hay & Forage	Pre 1984	Yellow	70781DSL	70106DSL	—	—	
New Holland	Hay & Forage	1984 – 1999	Yellow	94806DS	94807DS	94808DS	94807DSVOC (qt.)	
New Holland	Hay & Forage	1979 – Current	Black (Flat)	M1724GSE5DS	M1724GSE2DS	—	—	

Agriculture Enamel Paint Chart *continued*

STANDARD			COLOR	PART NO. PER SIZE			
MAKE	MODEL	YEAR	NAME	SPRAY	QUART	GALLON	LOW VOC
New Holland	Hay & Forage	1999 – Current	Bright Yellow	86109000DS	86109001DS	86109002DS	—
New Holland	Hay & Forage	2000 – Current	Dark Gray	B96104	B96105	B96106	B96105VOC (qt.)
New Holland	Tractors	2000 – Current	Blue	86109144DS	86109141DS	86109142DS	86109142DSVOC (gal.) 86109141DSVOC (spray)
New Holland	Tractors	2000 – Current	CNH Industrial Genuine Parts Dark Gray	B96104	B96105	B96106	B96105VOC (qt.)
New Holland	Tractors	Boomer 8N	Red	73340255	73340256	—	—
New Holland	Tractors	Boomer 8N	Beige	73340257	—	—	—

Construction Enamel Paint Chart

HIGH PERFORMANCE			COLOR	PART NO. PER SIZE			
MAKE	MODEL	YEAR	NAME	SPRAY	QUART	GALLON	LOW VOC
CASE	All	Pre – 1975	MS 10 Ind/ Federal Yellow	991098N	991084R2LF	B90890LF	—
CASE	All	1975 – 1983	MS 11 Power Yellow	B17665N	—	B17667LF	—
CASE	All	1983 – Current	MS 42 Power Tan	B17660N	B17661	B17662	B17661VOC (qt.) B17662VOC (gal.)
CASE	All	1983 – 1994	MS 44 Brown	B17675N	B17676	B17677	—
CASE	All	1995 – 2000	MS 37 Gray	B93228N	B93229	B93230	B93229VOC (qt.)
CASE	All	2000 – Current	CE Gray	B96025	B96026	B96027	B96026VOC (qt.) B96027VOC (gal.)
Ford/New Holland	—	1967 – 1980	Yellow	991098N	991084R2LF	—	—
Ford/New Holland	—	1981 – 1999	Yellow	M5771ASE5DS	M5771ASE2DS	M5771ASE3DS	—
Ford/New Holland	—	1999 – Current	Bright Yellow	86109000DS	86109001DS	86109002DS	—
Ford/New Holland	All	All	Black (Medium Gloss)	990121N	1132129R1	—	1132129R1VOC (qt.)
Ford/New Holland	—	1999 – 2000	Gray Ral 7024	86109004DS	86109005DS	86109006DS	—
Ford/New Holland	—	2000 – Current	CE Gray	B96025	B96026	B96027	B96026VOC (qt.) B96027VOC (gal.)
Ford/New Holland	—	2006 – Current	Light Gray	87298699	87298700	—	—
Kobelco	Dynamic Acera M/C, Acera Mark 8	Sept. 2006 – Current	Bright Yellow	—	—	86109001DSVOC	—
Kobelco	Cab SR, DA, Compact	—	Gray, Neutral	—	—	—	—

All Makes, Thinner & Primer

ALL MAKES DESCRIPTION	PART NO. PER SIZE				
	SPRAY	QUART	GALLON	FIVES	LOW VOC
Thinner	—	B17692	B17693	B17694	B17692VOC (qt.) B17693VOC (gal.)
Primer – MS 43 Gray	B91253N	B91254	B91255	—	B91254VOC (qt.) B91255VOC (gal.)
Primer – MS 43 Red Oxide	1131655N	991078R1	B90892	—	991078R1VOC (qt.) B90892VOC (gal.)
Primer – MS 43 Buff Primer	B95400	B95401	B95402	—	—

All Makes Agriculture & Construction Paint Chart

ALL MAKES DESCRIPTION	PART NO. PER SIZE			
	SPRAY	QUART	GALLON	LOW VOC
AC Orange	B505031	—	—	—
Cat Yellow	B505052	—	B505053	—
Cub Cadet White	B505051	—	—	—
Cub Cadet Yellow	B505050	—	—	—
Deere Ag Yellow	B505028	B505029	B505030	—
Deere Green	B505025	B505026	B505027	—
Gloss White	B505056	—	B505057	—
MF Red	B505042	B505043	—	—
Kubota Orange	B505034	—	—	—
Gloss Black	B17680N	B17681	B17682	B17681VOC (qt.) B17682VOC (gal.)
IH Red	533901DS	—	443101DS	—
Aluminum	996356N	990506R1	—	—
Semi Gloss Black	990121N	1132129R1	—	—
Ford Blue	B505020	9613386DS	—	—
Ford Gray	M20J1750SE5DS	—	—	—
Heat Resistant Black	87079108	—	—	—
Autumn Prime	8845000DS	—	—	—
Mineral Spirit	—	—	9673910DS (53 gal.)	—
High Temp. Black	B17690N	—	—	—
High Temp. Aluminum	B17691N	—	—	—

Index

ITEM NO.	PAGE	ITEM NO.	PAGE	ITEM NO.	PAGE
1131548R2	25	86109141DSVOC	27	991098N	27
1131611R1LF	26	86109142DS	27	991115N	26
1131655N	28	86109142DSVOC	27	991116R2	26
1131916R1	8	86109144DS	27	991116R2VOC	26
1132129R1	26, 27	86520567DS	10	996356N	28
1132129R1VOC	26, 27	86541699DS	13	B17562	26
1132221N	25	87079108	28	B17562VOC	26
1132224N	26	87298699	27	B17563	26
20J1750SE2DSVOC	26	87298700	27	B17564	26
251403	24	8845000DS	28	B17564VOC	26
407408R1	8	94806DS	26	B17565	26
407486R1	8	94807DS	26	B17565VOC	26
443101DS	28	94807DSVOC	26	B17566N	26
533901DS	28	94808DS	26	B17650N	26
547596R1	8	9613385DS	26	B17651LF	26
70036DS	26	9613386DS	26	B17651LFVOC	26
70036DSVOC	26	9613386DSVOC	26	B17652LF	26
70106DSLFL	26	9613387DS	26	B17655N	26
70365DS	26	9613387DSVOC	26	B17656	26
70365DSVOC	26	9624696DS	26	B17656VOC	26
70780DS	26	9624697DS	26	B17657	26
70781DSLFL	26	9624697DSVOC	26	B17660N	27
73340255	27	9624698DS	26	B17661	27
73340256	27	9624699DS	26	B17661VOC	27
73340257	27	9624699DSVOC	26	B17662	27
73340370	8	9673509DS	26	B17662VOC	27
73340450	13	9673910DS	28	B17665N	27
73340638	25	9706315DS	10	B17667LF	27
73340733	8	9821006	9	B17670N	26
73340734	8	99000330DS	26	B17671LF	26
73340918	8	99000332DS	26	B17671LFVOC	26
73341634	24	99000333DS	26	B17672LF	26
73343736	6	99000334DS	26	B17675N	27
73343904	8	990121N	26, 27	B17676	27
86109000DS	27	990506R1	28	B17677	27
86109001DS	27	991010R2LF	26	B17680N	26, 28
86109001DSVOC	27	991010R2LFVOC	26	B17681	26, 28
86109002DS	27	991012N	26	B17681VOC	26, 28
86109004DS	26, 27	991049R2	25	B17682	26, 28
86109005DS	26, 27	991078R1	28	B17682VOC	26, 28
86109006DS	26, 27	991078R1VOC	28	B17690N	28
86109141DS	27	991084R2LF	27	B17691N	28

Index

ITEM NO.	PAGE	ITEM NO.	PAGE	ITEM NO.	PAGE
B17692	28	B90890LF	27	M5771ASE5DS	27
B17692VOC	28	B90892	28	MCNAS8OZ	6
B17693	28	B90892VOC	28	MCNAS1GAL	6
B17693VOC	28	B91253N	28	MCNAS5GAL	6
B17694	28	B91254	28	MCNH7200	24
B504438	26	B91254VOC	28	MCNH7201	6
B505020	28	B91255	28	MCNH7202	6
B505025	28	B91255VOC	28	MCNH7203	6
B505026	28	B93228N	27	MCNH7204	6
B505027	28	B93229	27	MCNH7205	5
B505028	28	B93229VOC	27	MCNH7207	5
B505029	28	B93230	27	MC295HHD	24
B505030	28	B95400	28	MC4001	25
B505031	28	B95401	28	MC50BCO	10
B505034	28	B95402	28	MC50WHD	24
B505042	28	B96025	27	MC7000GL	25
B505043	28	B96026	27	REN3001	25
B505050	28	B96026VOC	27	THDSS	25
B505051	28	B96027	27	ZAD4	11
B505052	28	B96027VOC	27	ZAD6	11
B505053	28	B96104	26	ZPX14250	14
B505056	28	B96105	26	ZPX14300	14
B505057	28	B96105VOC	27	ZPX18130	15
B505497	10	B96106	26, 27	ZPX18572	18
B505499	24	M1525ASE2DS	26	ZPX24010	21
B505500	10	M1525ASE5DS	26	ZPX24210	19
B505501	9	M1619ASE2DS	26	ZPX24236	19
B505502	9	M1619ASE5DS	26	ZPX24310	19, 20
B505503	9	M1724GSE2DS	26	ZPX25223	15
B505504	9	M1724GSE5DS	26	ZPX26210	19, 20
B505508	13	M1J956SE2DSLFL	26	ZPX26236	19, 20
B505510	4	M1J956SE3DSLFL	26	ZPX27010	21
B505512	4	M1J956SE5DSLFL	26	ZPX27110	19, 20
B505513	7	M1J957SE2DS	26	ZPX27136	19, 20
B505514	7	M1J957SE2DSVOC	26	ZPX27736	19, 20
B505515	7	M1J957SE3DS	26	ZPX29050	19, 21
B505517	5	M1J957SE5DS	26	ZPX30562	17
B505518	5	M20J1750SE2DS	26	ZPX30564	17
B90882LF	26	M20J1750SE3DS	26	ZPX51050	16
B90882LFVOC	26	M20J1750SE5DS	26, 28	ZPX51530	16
B90886	26	M5771ASE2DS	27	ZPX51550	16
B90888	26	M5771ASE3DS	27	ZPX51850	16

Index

ITEM NO.	PAGE
ZPX59250	16, 22
ZPX60936	23
ZPX68036	23
ZPX76716	9
ZPX80050	17
ZPX80500	15
ZPX80855	17
ZPX81158	17
ZPX81160	17
ZPX81724	18
ZPX82180	18
ZPX85519	18
ZRG011BELC	24
ZRG012WGC	10
ZRG015GELC	12
ZRG016LSC	12
ZRG017BRC	4
ZRG017BRCCAN	4
ZRG017CRBCCAN	4
ZRG017SUL	5
ZRG018GLC	4
ZRG032LSC	12

PLANOGRAM

Chemicals

ROW	PRODUCT NAME	PART NO.	QTY.
1	Medium Strength Threadlocker Blue	ZPX24210	6
1	Medium Strength Threadlocker Blue	ZPX24210	6
1	Permanent Strength Threadlocker Red	ZPX26210	6
1	High Temperature Anaerobic Gasket Maker	ZPX51050	6
1	High Temperature Anaerobic Gasket Maker	ZPX51050	6
2	Permanent Strength Threadlocker Red	ZPX26210	6
2	Medium Strength Threadlocker Blue	ZPX24210	6
2	Medium Strength Threadlocker Blue	ZPX24210	6
2	Permanent Strength Threadlocker Red	ZPX26210	6
2	High Temperature Anaerobic Gasket Maker	ZPX51050	6
2	High Temperature Thread Sealant	ZPX59250	
3	Permanent Strength Threadlocker Red	ZPX26210	4
3	Industrial Strength Rust Penetrant	B505501	4
3	Industrial Strength Rust Penetrant	B505501	4
3	Chain & Cable Lubricant	B505500	4
3	Chain & Cable Lubricant	B505500	4
3	Chain & Cable Lubricant	B505500	4
3	Starting Fluid	ZAD6	4
3	Starting Fluid	ZAD6	4
3	Starting Fluid	ZAD6	4
3	Anaerobic Flange Sealant	ZPX51530	4-6
4	Non-Stick Graphite	407408R1	4
4	Non-Stick Graphite	407408R1	4
4	Non-Stick Graphite	407408R1	4
4	Brake Parts Cleaner	ZRG017BRC	4
4	Brake Parts Cleaner	ZRG017BRC	4
4	Brake Parts Cleaner	ZRG017BRC	4
4	Brake Parts Cleaner	ZRG017BRC	4
4	Hydraulic Brake Oil	86541699DS	6
4	Hydraulic Brake Oil	86541699DS	6



Merchandising Products

MERCHANDISING PRODUCTS	PART NO.	QTY.
Lozier 48" Mobile Island with end caps – Slatwall Back Panel	SF-ISTLEG16C-RTF4-GRY	1
Lozier 36" x 15" Shelves	SF-315N/GRY	2
36" Chemicals Header	FMD-3CaseIH-CHEM	1
Magnetic Sign Holder	FMD-MSH	1
6" Plastic Backplate Scanner Hook	TRI-SPH6	–
Scanner Hook Label Holders	TRI-LH1.3X2	–
Perforated Price Labels	MCG-CasellHHKLabel	–
1 ¼" Red Shelf Strips	HOP-RedSHLFStrip	–

Notes:

- Quantities are based on what fits appropriately on each peg hook and shelf
- Planogram can be executed on a 36" standard island end cap
- These part numbers are a representation of a total category. Adjust your display with products to fit your local market
- Merchandising Products can be viewed and purchased on the Retail Environment Services website via the Dealer Portal:
Dealer Portal >> Discover >> Tools and Applications >> Dealership Merchandising-Case IH/CASE/New Holland





PM-20114 12/2020 Replaces: PM-15260

©2021 CNH Industrial America LLC. All rights reserved. CNH Industrial Genuine Parts is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC, are the property of those respective companies.